



## Steps




( Picture 1 )

- 1.Ensure to tighten the pin nut ① before using. ( see picture 1 )  
( ※ Loosen the pin nut ① for pin replacement )

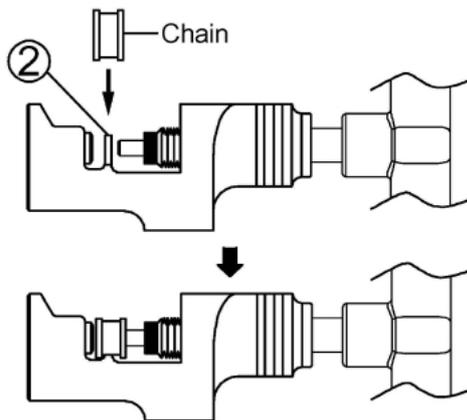

( Picture 2 )

- 2.Place the chain on the cradle ②. ( see picture 2 )

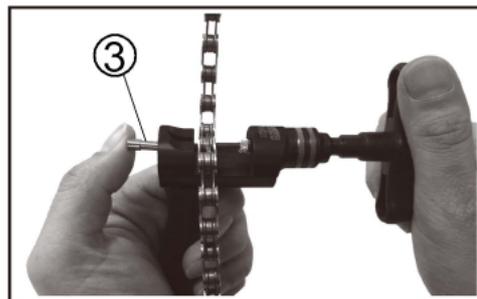

( Picture 3 )

- 3.Put on and push the pin guider ③ as picture then start chain breaking or assembly. ( see picture 3 )

⚠ TB-CC20 suits for 8 to 10 speed chains  
TB-CC40 suits for 1/8 " to 3/16 " BMX  
and single speed chains